

High Performance Industrial 12 Port Gigabit Managed Switch with 8 port Gigabit PoE for Vehicles 24VDC Power

DP412-LV Series

Industrial 12-port Full Gigabit Managed (PoE+) Switch, 8GT (PoE+) and 4GF/4GT, 24VDC Power Boost

Featuring a 24V to 54VDC PoE Output booster design, the DP412-LV series allows vehicles with 12~30VDC power input to utilize full PoE and management functions. The series offers 8 ports of full-gigabit PoE+ Ethernet, with DP412-LV providing an additional 4 ports of 100/1000M Fiber SFP and DP412-4GT-LV offering 4 ports of copper RJ45 Gigabit Ethernet. With non-blocking wire-speed switching, cyber-security, ERPSv2/RSTP network redundancy, IGMP snooping for multicast stream management, and full L2+ management software features, the DP412-LV series ensures reliable and efficient performance in rugged industrial environments with harsh and vibration-prone conditions.



DP412-LV

DP412-4GT-LV



Features & Benefits

High performance Full Gigabit Switching & Extreme 802.3at.af Booster PoE+

- Powerful 1.2GHz ARM Cortex-A9 processor
- Non-blocking switch fabric with high throughput 36Gbps
- Broadcom high performance chipset up to 80Gbps Switching Capacity
- 8 flexible Class of Service (CoS) queues
- 16K MAC address table
- 9Kb Jumbo Frame
- DDM function for fiber connectivity monitoring
- Energy-Efficient Ethernet for power saving
- 4 100M/1000M SFP fiber uplink (DP412-LV)
- 4 100M/1000M RJ45 copper uplink (DP412-4GT-LV)

Powerful PoE Boost Features

- 8-port Full Gigabit 802.3at/af compliant PoE+ ports, up to 30W per port.
- Booster PoE design available 24~57V Power input, maximum 120W power budget at 24V input.
- PoE management provides PoE On/Off, Budget control, PoE port mode, scheduling and PD alive check

ITU ERPSv2 PLUS Ring Technology

- ITU G.8032 v1/v2 ERPS Ring Redundancy & HW-based CFM for quick acknowledgement while Gigabit copper link failure, providing <50ms recovery time and seamless restoration.
- ERPSv2 available to replace legacy Ring + Chain + Dual Homing
- Inter-Operability with 3rd party industrial switch and still remain fast recovery time.
- Support Enhanced RSTP for large ring network topology with up to 80 switches.

Industrial IoT LAN Management

- Management Softwares: NetMaster, Network Management System and ViewMaster, Group Discovery & Configuration Utility
- Support Modbus TCP for monitoring in the field
- Support Ethernet IP for monitoring in the field

IEC62443-4-2 Level 3 / 4 Cyber Security

- L2-L7 IPv4/IPv6* Access Control List (ACL)
- DHCP Snooping, IP Source Guard, Dynamic ARP Inspection
- 802.1Q VLAN, Private VLAN, Advanced Port Security*
- Multi-Level user passwords
- HTTPS/SSH/SFTP, 256-bit encryption
- 802.1X MAB for non-802.1X compliant end devices
- RADIUS/TACACS+ centralized password authentication

L2+ Management Switch Features


- Various configuration paths, including WebGUI, CLI, SNMP, Modbus TCP, LLDP topology control
- Layer 2 Switch features include VLAN, QoS, LACP/Trunk, Rapid Spanning Tree protocol...etc.
- IGMP Snooping v1/v2/v3, IGMP Query, 512 L2 Multicast Groups for video applications
- Built-in DHCP Server that automatically provides and assigns IP addresses, default gateways to clients

Rugged Design for Industrial Surveillance Network with Wide Power Input Range


- 24~57V wide power range design with redundant power input
- Available for 12V Low voltage
- Excellent heat dissipation design for operating in -40~75°C environments
- High level **EMC protection** exceeding traffic control and heavy industrial standards' requirements
- EN IEC 61000-6-2 Immunity standard for Industrial Environment
- EN IEC 61000-6-4 Emission standard for Industrial Environment



Interfaces

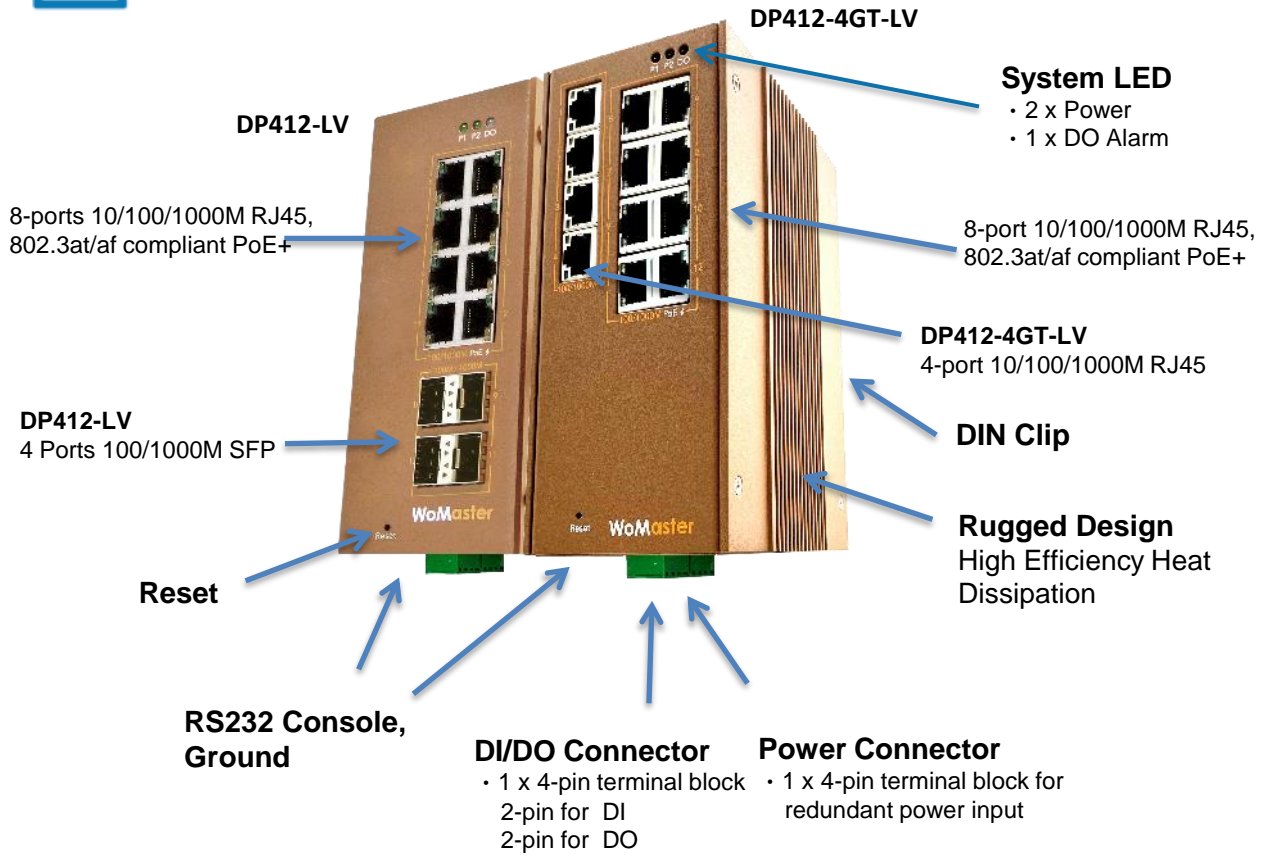


Dimensions

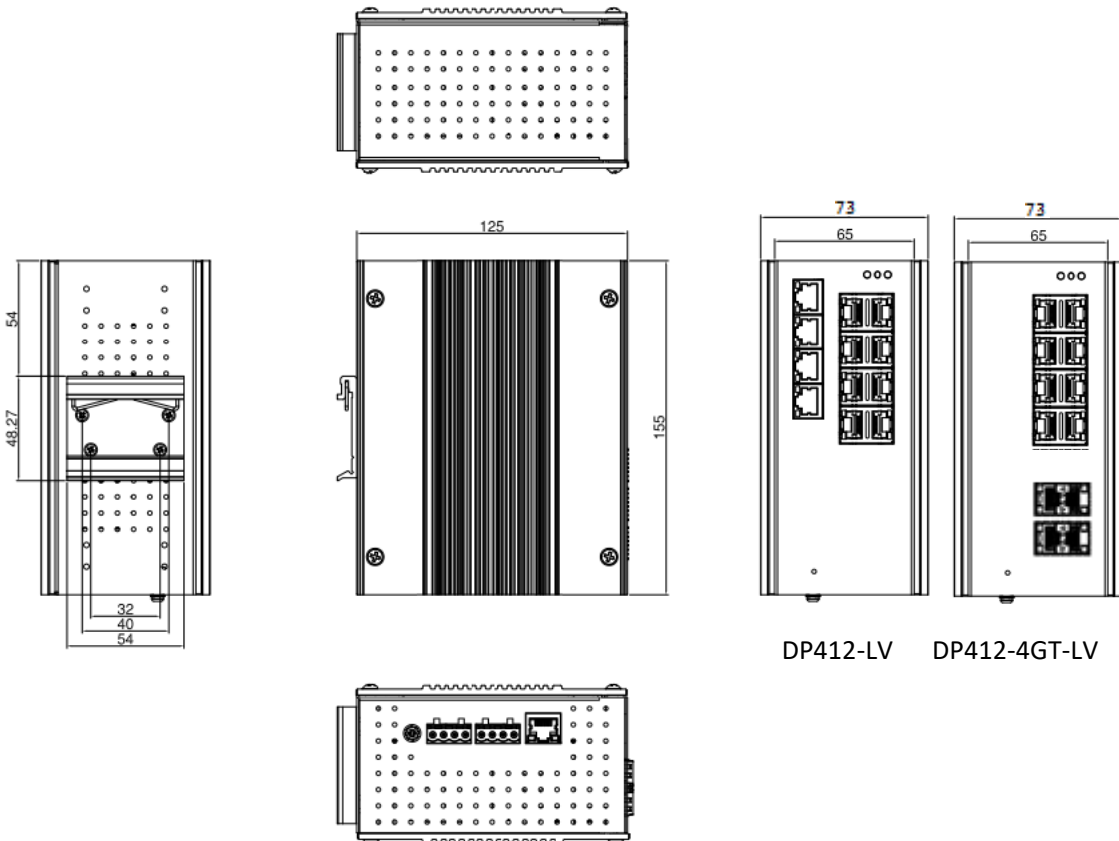


✓ **ITU-T G.8032 ERPSv2 gives ultimate Inter-Operability, Flexibility, and Scalability**

G.8032 v.2 ERPS is becoming the most common standard for redundancy on industrial networks and replacing proprietary ring redundancy and standard Ethernet Ring Switching, as it provides stable protection of the entire Ethernet Ring from any loops and open standard for 3rd party devices. The ITU-T G.8032 v2 ERPS recovers the network break within less than 20ms recovery time thus significantly increases network reliability for critical IIoT applications, such as heavy industrial automation (power substation and oil and gas vertical markets), ITS (traffic control, public transportation), railway networks, and other smart city applications concerning public safety.

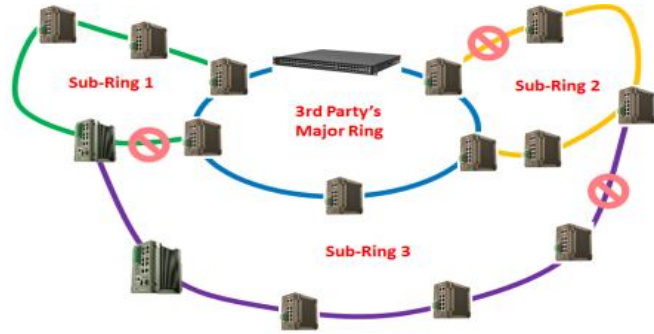

G.8032 v1 only supports single ring topology, whilst G.8032 version 2 additionally features recovery switching for Ethernet traffic in Multiple Ring (ladder) of conjoined Ethernet Rings by one or more interconnections which saves deployment costs by providing wide-area multipoint connectivity with reduced number of links. Deploying switches with support of G.8032 v2 ERPS ensures highly resilient Ethernet infrastructure whilst simultaneously saving costs, as they can interoperate with third-party switches and still guarantee fast network recovery time without any data loss.


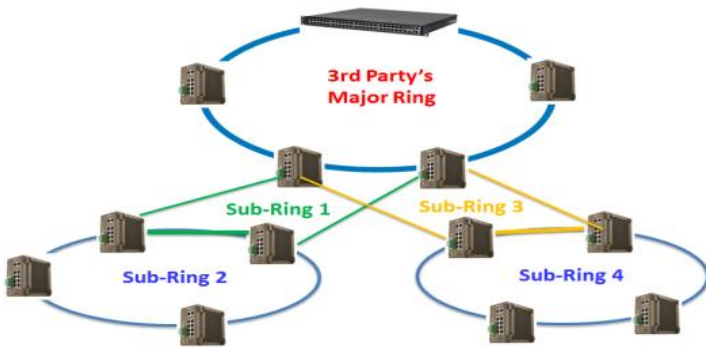


✓ **ITU-T G.8032 ERPSv2 reduces coupling Ring failure recovery time**

The G.8032 ERPS v2 technology effectively saves the recovery time for coupling ring link breakdown from 300 sec to less than 20ms by immediately change the topology of both major ring and sub ring.


✓ **WoMaster ERPS v2 PLUS Technology – Fast Giga Copper Recovery Time**

The adaption of Broadcom® CFM Technology can reduce CFM Transmission for link failure within 3.3ms, thus to detect the ring link fault within 11.55ms (3.5 times the CFM Interval) for ERPSv2 mechanism to respond. Once the ring port fails, the ERPS RPL-Owner will forward the backup port and recover the GbE copper within 20ms under the condition that 250pcs nodes in one ring.

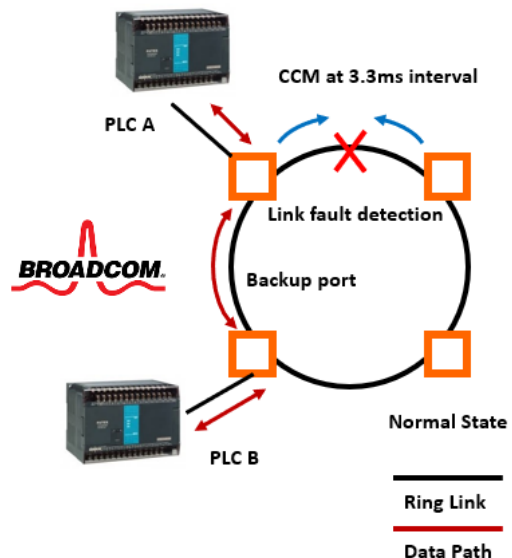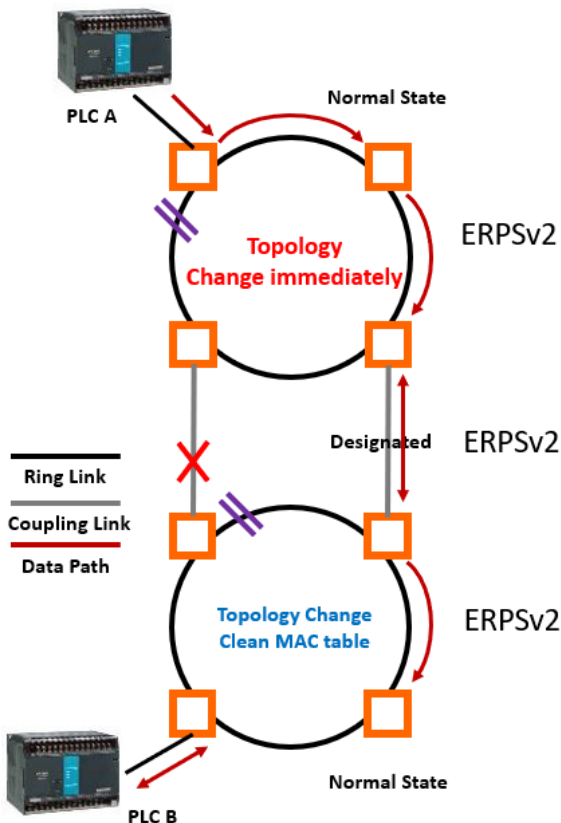


✓ **Advanced Port Based Security- IEEE802.1 x MAB (MAC Authentication Bypass)**

MAB enables port-based access control by bypassing the MAC address authentication process to TACACS+/Radius Server. Prior to MAB, the endpoint's (ex. PLC) identity is unknown and all traffic is blocked. The switch examines a single packet to learn and authenticate the source MAC address. After MAB succeeds, the endpoint's identity is known and all traffic from that endpoint is allowed. The switch performs source MAC address filtering to help ensure that only the MAB-authenticated endpoint is allowed to send traffic.

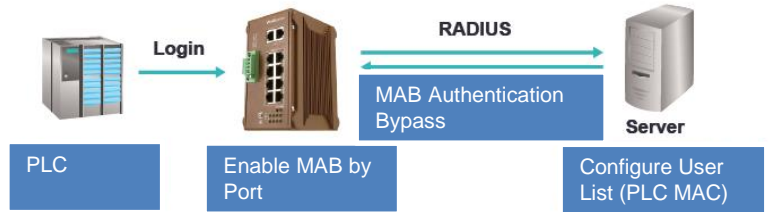

In addition to MAB, the authentication can also be done by the pre-configured static or auto-learn MAC address table in the switch.

- MAC address Auto Learning enables the switch to be programmed to learn (and to authorize) a preconfigured number of the first source MAC addresses encountered on a secure port. This enables the capture of the appropriate secure addresses when first configuring MAC address-based authorization on a port. Those MAC addresses are automatically inserted into the Static MAC Address Table and remained there until explicitly removed by the user.
- The port security is further enhanced by Sticky MAC setting. If Sticky MAC address is activated, the MACs/Devices authorized on the port 'sticks' to the port and the switch will not allow them to move to a different port.
- Port Shutdown Time allows users to specify for the time period to auto shutdown the port if a security violation event occurs.

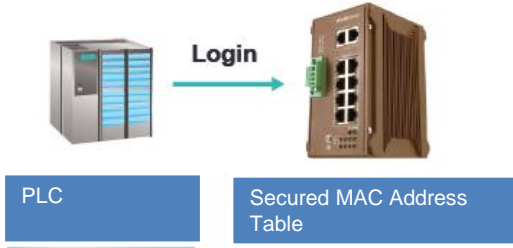


✓ **DHCP Snooping**


DHCP snooping acts like a firewall between untrusted hosts and trusted DHCP servers. It performs the following activities:

- Validates DHCP messages received from untrusted sources and filters out invalid messages.
- Rate-limits DHCP traffic from trusted and untrusted sources.
- Builds and maintains the DHCP snooping binding database, which contains information about untrusted hosts with leased IP addresses.
- Utilizes the DHCP snooping binding database to validate subsequent requests from untrusted hosts.

DHCP snooping is enabled on a per-VLAN basis. By default, the feature is inactive on all VLANs. You can enable the feature on a single VLAN or a range of VLANs.

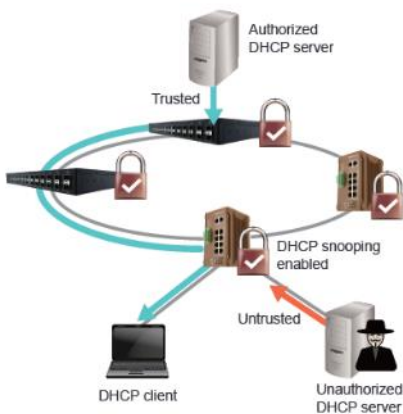

✓ **Dynamic ARP Inspection (DAI)**

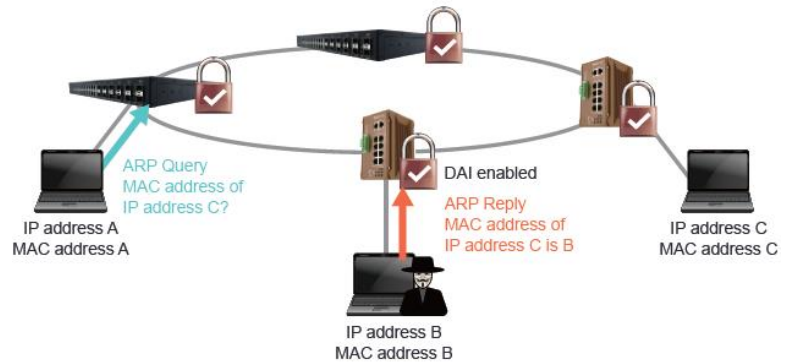

DAI validates the ARP packets in a network. DAI intercepts, logs, and discards ARP packets with invalid IP-to-MAC address bindings. This capability protects the network from some man-in-the-middle attacks.

DAI ensures that only valid ARP requests and responses are relayed. The switch performs these activities:

- Intercepts all ARP requests and responses on untrusted ports
- Verifies that each of these intercepted packets has a valid IP-to-MAC address binding before updating the local ARP cache or before forwarding the packet to the appropriate destination
- Drops invalid ARP packets.


DAI determines the validity of an ARP packet based on valid IP-to-MAC address bindings stored in a trusted database, the DHCP snooping binding database. This database is built by DHCP snooping if DHCP snooping is enabled on the VLANs and on the switch. If the ARP packet is received on a trusted interface, the switch forwards the packet without any checks. On untrusted interfaces, the switch forwards the packet only if it is valid.

✓ **IP Source Guard**

IP source guard provides source IP address filtering on a Layer 2 port to prevent a malicious host from impersonating a legitimate host by assuming the legitimate host's IP address. The feature uses dynamic DHCP snooping and static IP source binding to match IP addresses to hosts on untrusted Layer 2 access ports.

Initially, all IP traffic on the protected port is blocked except for DHCP packets. After a client receives an IP address from the DHCP server, or after static IP source binding is configured by the administrator, all traffic with that IP source address is permitted from that client.


Traffic from other hosts is denied. This filtering limits a host's ability to attack the network by claiming a neighbor host's IP address.

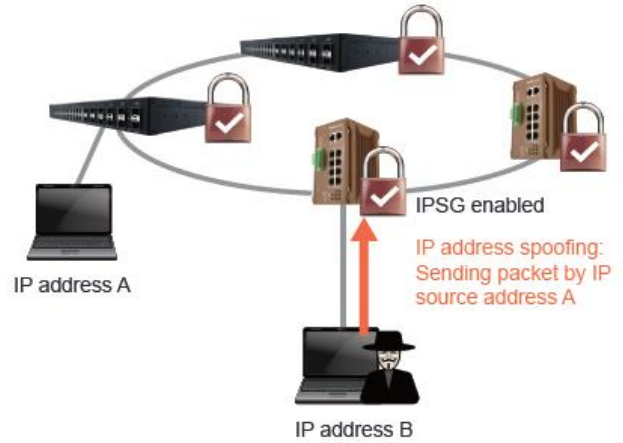

✓ **IPv4/v6 Access Control List (ACL)**

Packet filtering limits network traffic and restricts network use by certain users or devices. ACLs filter traffic as it passes through a switch and permits or denies packets crossing specified interfaces. An ACL is a sequential collection of permit and deny conditions that apply to packets. When a packet is received on an interface, the switch compares the fields in the packet against any applied ACLs to verify that the packet has the required permissions to be forwarded, based on the criteria specified in the access lists.

WoMaster supports L2-L7 ACLs, parsing up to 128 bytes/packet and L2-L7 packet classification and filtering IPv4/IPv6 traffic, including TCP, User Datagram Protocol (UDP), Internet Group Management Protocol (IGMP), and Internet Control Message Protocol (ICMP).

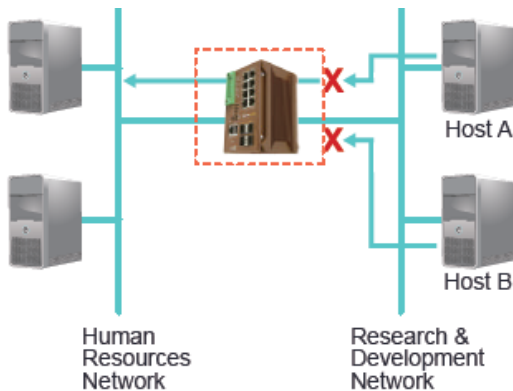

X = ACL denying traffic from Host B and permitting traffic from Host A
← = Packet



✓ **Multi-Level User Passwords**

Different centralized authentication server is supported such as RADIUS and TACACS+. Using a central authentication server simplifies account administration, in particular when you have more than one switches in the network.

Authentication Chain is also supported. An authentication chain is an ordered list of authentication methods to handle more advanced authentication scenarios. For example, you can create an authentication chain which first contacts a RADIUS server, and then looks in a local database if the RADIUS server does not respond.

✓ **NMS NetMaster Made Easy Deploy and Visualize Large Scale of ERPS Ring and VLAN**

It is very time consuming and technical to set up a large group of ERPS v2 ring. However, NetMaster NMS provides a smart way to configure a group of ERPS ring and visualize ERPS major/sub ring in purple/yellow color. With VLAN visualization, devices, ports, and links with the VLAN ID will be colored-coded.

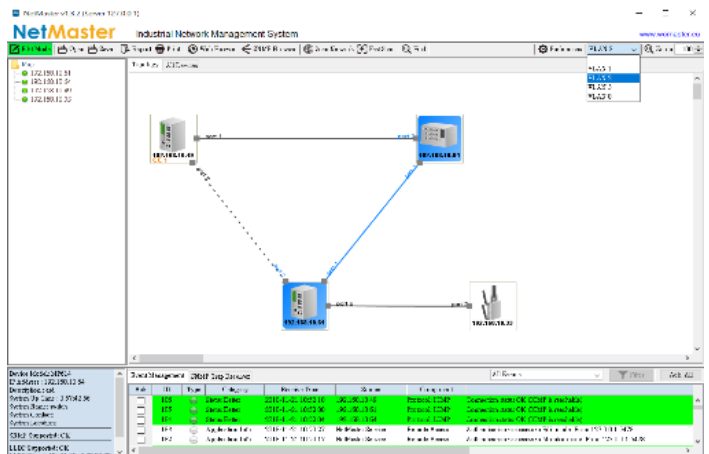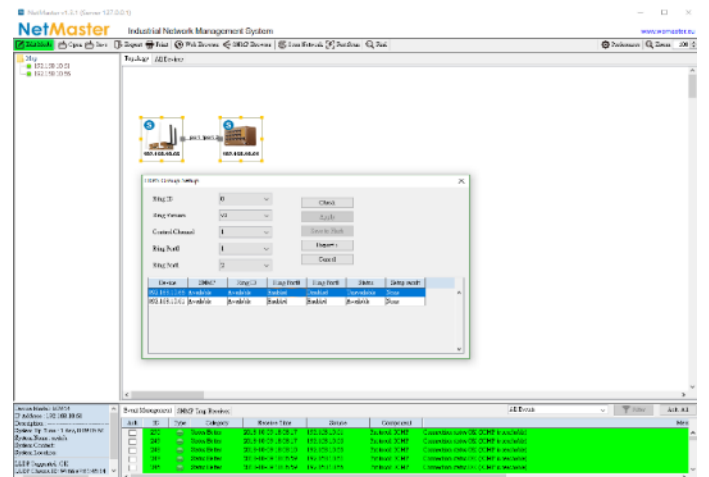

Technology	
Standard	IEEE 802.3 10Base-T Ethernet
	IEEE 802.3u 100Base-TX Fast Ethernet
	IEEE 802.3u 100Base-FX Fast Ethernet Fiber
	IEEE 802.3ab 1000Base-T Gigabit Ethernet Copper
	IEEE 802.3z Gigabit Ethernet Fiber
	IEEE 802.3x Flow Control and back-pressure
	IEEE 802.3az (Energy Efficient Ethernet)
	IEEE 802.1p Class of Service (CoS)
	IEEE 802.1Q VLAN and GVRP
	IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
	IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP)
	IEEE 802.1S Multiple Spanning Tree Protocol (MSTP)
	IEEE 801.1AX/802.3ad Link Aggregation Control Protocol (LACP)
	IEEE 802.1x Port based Network Access Protocol
	IEEE 1588 Precision Time Protocol v2
	IEEE 802.3at PoE+ and 802.3af PoE compliant
ITU-T G.8032 version 2 Ethernet ring protection switching(ERPSv2)	
Performance	
Switch Technology	Broadcom BCM53547 chipset, up to 80Gbps Switching Capacity for high density application Non-Blocking Switch Capacity in 12GT/8GT+4GF: 24Gbps Forwarding Rate in 12 Gigabit ports: 17.856Mpps Store and Forward Technology, Internal Packet Buffer: 4Mb
CPU/RAM	Cortex-A9, max. 1.2GHz, DDR3 2Gb
Number of MAC Address	16K
Jumbo Frame	9216 Bytes
VLAN	256 VLANs, VLAN ID 1~4094
IGMP Groups	512
Traffic Prioritize	8 Priority Queues per Port
Interface	
Ethernet Port	8 x 100/1000Base-T RJ45 Auto Negotiation, Full Duplex, Auto MDI/MDIX, 802.3at/af complaint PoE+ DP412-LV: 4 x 100/1000Base-X SFP Auto Negotiation, Full Duplex DP412-4GT-LV: 4 x 100/1000Base-T RJ45 Auto Negotiation, Auto MDI/MDIX
System LED	2 x Power: Green On 1 x DO/Alarm: Red On
Ethernet Port LED	Link (Green On), Activity (Green Blinking), PoE On (Amber On), PoE Off (Off)
SFP LED (SFP socket/model)	Port: Link (Green On), Activity (Green Blinking); 1000M: Speed 1000M (Amber On), Speed 100M (Off)
Reset	System Reboot(2-6 Seconds)/Default Settings Reset(over 7 Seconds)
Console	1 x RS232 in RJ45 for System Configuration. Baud Rate: 115200.n.8.1, Pin Define: 3: TxD, 6:RxD, 5:GND
Digital Input, Digital Output	4-Pin Removable Terminal Block Connector, 2-Pins for DI, 2-Pins for DO (Relay Alarm) 1x Digital Output: Dry Relay Output with 0.5A /24V DC 1x Digital Input: High: DC 11V~30V, Low: DC 0V~10V
Power Input	4-Pin Removable Terminal Block Connector for Redundant Power
Power Requirement	
Input Voltage	DP412-LV/DP412-4GT-LV: 24VDC (12~30VDC) DP412-MV: 54VDC (802.3af: 44-57V/802.3at: 50-57V)
Reverse Polarity Protect	Yes
Input Current	0.67A @ 24V, not include PoE
Power Consumption	Typical 15W@24V (not include PoE TBD) suggest to reserve 15% tolerance

PoE	
Power forwarding mode	802.3at Alternative A
PoE Power Budget	System: Up to 120W@24V, 60W@12V Port 1~8: IEEE 802.3at/af, Max. 30W/port
PoE Standard	IEEE 802.3at PoE+, IEEE 802.3af PoE
Management	System/Port Power Budget Control, PoE Scheduling, Priority, PD Alive Check, PoE Status
Software	
Management	WebGUI, Command Line Interface (CLI), IPv4/IPv6(RFC2460), Telnet, SNMP v1/v2c/v3, RMON, SNMP Trap, LLDP, DHCP Server/Client/Option 82, TFTP, System Log, SMTP
Traffic Management	Flow Control, Rate Control, Storm Control, CoS, QoS, RFC 2474 DiffServ
Filter	IGMP Snooping v1/v2/v3, IGMP Snooping Fast-Leave/Immediate-Leave, IGMP Query, GMRP, IEEE802.1Q VLAN, QinQ, GVRP, Private VLAN, IGMP Query Solicitation/Request*, MLDv1/v2 Snooping*, IEEE 802.1v*
Security	IEEE 802.1X/RADIUS, TLS v1.2, Access Control List (ACL, MAC/IP/ARP filter, Port Security), HTTPs/SSH secure login, First login password management
Advanced Security	Advanced Security: TACACS+, Multi-user authentication, IEEE802.1x MAB, DHCP Snooping/IPSG, Dynamic ARP inspection, DoS/DDoS*, SFTP*
Redundancy	WoMaster ERPSv2 PLUS , HW CFM, Rapid Spanning Tree Protocol includes STP/RSTP/MSTP, eRSTP, Loop Protection, Port Trunk/801.1AX/802.3ad LACP eRSTP (Enhanced Rapid Spanning Tree), up to 80 switches in one Ring
Time Management	NTP, IEEE 1588 Precision Time Protocol v2
Industrial IoT	Modbus TCP, Ethernet/IP
Utility	ViewMaster, NetMaster
MIB	ERPS MIB, MIB-II, Ethernet-like MIB*, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RMON MIB Group 1, 2, 3, 9*, Private MIB
Diagnostic	LLDP, Port Mirror, Ping, Port Statistic, Event Log
Mechanical	
Installation	DIN Rail
Enclosure Material	Steel Metal Additional Aluminum Side Heat Sink
Dimension	73x155x125 (W x H x D) / without DIN Rail Clip
Ingress Protection	IP30
Weight	~1285g without package (TBD)
Environmental	
Operating Temperature	-40°C~70°C
Humidity	0%~95% Non- Condensing
Storage Temperature	-40°C~85°C
MTBF	>300,000 hours
Warranty	5 years
Standard	
CE	EN IEC 61000-6-2 Immunity standard for Industrial Environment EN IEC 61000-6-4 Emission standard for Industrial Environment, includes EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8
FCC	FCC part 15B Class A



Ordering Information

Model Name	Description
DP412-LV	Industrial 12-port Full Gigabit L2+ Managed PoE Switch, 8 x Giga PoE+ 4 x Giga SFP, Dual 24VDC Inputs
DP412-4GT-LV	Industrial 12-port Full Gigabit L2+ Managed PoE Switch, 8 x Giga PoE+ 4 x Giga RJ45 , Dual 24VDC Inputs
	Package List
	1 x Product Unit
	2 x 4-pin Removable Terminal Block Connector
	1 x Attached Din Clip
	1 x Quick Installation Guide



Optional Accessory

Item	
MK-D1-2	Wall-mounting kit with 2 plates and 8 screws
CBL-RJ45F9-1.5M	Serial RS232 console cable RJ45 to DB9 Female 1.5Meter
PSD40-24	40W/24VDC DIN-rail power supply
SFPGEM05	SFP, 1000Mbps, LC, multi, 550M, 0~70°C
SFPGEM05T	SFP, 1000Mbps, LC, multi, 550M, -40~85°C
SFPGEM05D	SFP, 1000Mbps, LC, multi, DDM, 550M, 0~70°C
SFPGEM05DT	SFP, 1000Mbps, LC, multi, DDM, 550M, -40~85°C
SFPGEM2	SFP, 1000Mbps, LC, multi, 2KM, 0~70°C
SFPGEM2T	SFP, 1000Mbps, LC, multi, 2KM, -40~85°C
SFPGEM2D	SFP, 1000Mbps, LC, multi, DDM, 2KM, 0~70°C
SFPGEM2DT	SFP, 1000Mbps, LC, multi, DDM, 2KM, -40~85°C
SFPGES10	SFP, 1000Mbps, LC, single, 10KM, 0~70°C
SFPGES10T	SFP, 1000Mbps, LC, single, 10KM, -40~85°C
SFPGES10D	SFP, 1000Mbps, LC, single, DDM, 10KM, 0~70°C
SFPGES30	SFP, 1000Mbps, LC, single, 30KM, 0~70°C
SFPGES30T	SFP, 1000Mbps, LC, single, 30KM, -40~85°C
SFPGES30D	SFP, 1000Mbps, LC, single, DDM, 30KM, 0~70°C
SFPGES10-A	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1310nm RX-1550nm, 0~70°C
SFPGES10-B	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1550nm RX-1310nm, 0~70°C
SFPGES10T-A	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1310nm RX-1550nm, -40~85°C
SFPGES10T-B	SFP, 1000Mbps, LC, single, 10KM, BiDi TX-1550nm RX-1310nm, -40~85°C
SFPGES10D-A	SFP, 1000Mbps, LC, single, DDM, 10KM, BiDi TX-1310nm RX-1550nm, 0~70°C
SFPGES10D-B	SFP, 1000Mbps, LC, single, DDM, 10KM, BiDi TX-1550nm RX-1310nm, 0~70°C