



Military Grade 19" Rack Mount Panel PC (Intel® Core i7 Platform)

MODEL #: R19IH3S-MLA3-8

Mechanical Design



- 19" SXGA TFT-LCD
- Intel® Core i7 4650U 3.30GHz Processor
- Anti-Corrosion Housing / Fanless
- Compliant with MIL-STD-810G/F
- Flush Rack / Rack Mount Mechanical Design (9U)
- Convenient On-Screen Display Controls
- AC 110~240V Power input default / Isolation DC 9~36V Power input (Optional)
- Built-in Light Sensor for auto brightness control
- Military Grade Power Connector (MIL-DTL-38999/1 & 38999/3)

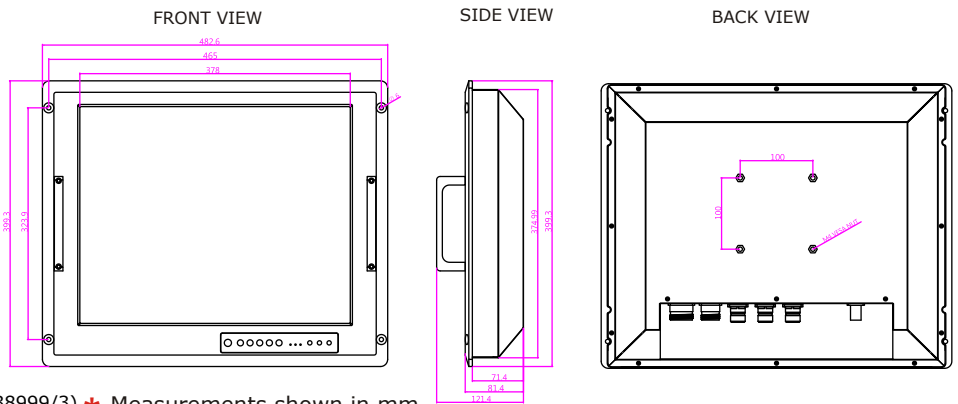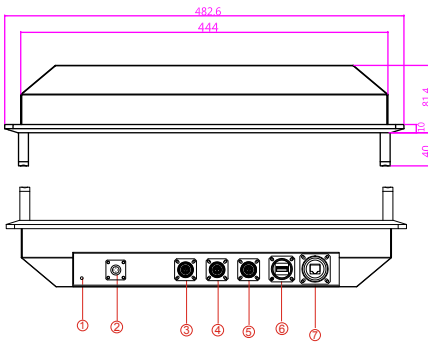

1. Ground
2. AC Power in (MIL-DTL-38999/1)
3. VGA (MIL-DTL-38999/3)
4. RS-232 (MIL-DTL-38999/3)
5. RS-232 (Optional)
6. USB 2.0 A Type (MIL-DTL-38999/3)
7. LAN (MIL-DTL-38999/3)

- * Measurements shown in mm.
- * Tolerance of all dimensions is shown as follow 0~30 mm ± 0.1 mm, 30~50 mm ± 0.15 mm, 50~120 mm ± 0.2 mm, above 120 mm ± 0.25 mm.
- * Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

Display Specification

Characteristics :

- Resolutions : 1280 x 1024
- Brightness : 350 cd/m² (typ.)
- Contrast Ratio : 1000 : 1 (typ.)
- Viewing Angles : -85~85(H); -80~80(V)
- Max Colors : 16.7M (Colors)

System Specifications :

- Processor : Intel® Core i7 4650U 3.30GHz
- BIOS : AMI 16Mbit Flash
- Processor Graphics : Intel® HD Graphics 5000
- System Memory : 1 x SO-DIMM DDR3L 1600, Default 4GB
- Lan Controller : Intel® Ethernet Controller 1211-AT + Intel® Gigabit Ethernet PHY 1218-LM
- Storage : mSATA SSD, Default 64GB
- Expansion Slot : 1 x Mini PCIe slot (for USB module)

* A customized housing is needed if you would like to have the PCI expansion.

Power Specifications :

- Power Input : Default AC 110~240V in
Optional isolation DC 9~36V in

Environment Considerations :

- Operating Temperature : -20 deg. C to 60 deg. C
- Operating Humidity : 95%RH ±3%

I/O Connectors

- Plug & Play : VESA DDC 1/2B
- Back Panel I/O Port : 1 x Power Input (MIL-DTL-38999/1)
1 x VGA (MIL-DTL-38999/3)
1 x RS232 (MIL-DTL-38999/3)
1 x USB 2.0A Type (MIL-DTL-38999/3)
1 x LAN (MIL-DTL-38999/3)

* If you require external test report, Winmate will charge NRE fee.

Order Information (Optional)

- Touch** : 5 Wires Resistive / 5 Wire Resistive with EMI Coating
- Glass** : EMI Coating Glass (Default AR Glass)
- OS** : Windows Embedded Standard 7
Windows Embedded 8 Standard
Windows Embedded 8.1 Industry
Windows 10 IoT Enterprise
- Storage** : mSATA SSD up to 256GB
- RAM** : SO-DIMM DDR3 1666, max up to 8GB
- Power** : Optional isolation 9~36V DC in

Default Accessories

- 1 x MIL-DTL-38999/1 Power cord / Cable
- 1 x MIL-DTL-38999/3 VGA Cable
- 1 x MIL-DTL-38999/3 RS232 Cable
- 1 x Driver & Manual CD




Military Grade 19" Rack Mount Panel PC (Intel® Core i7 Platform)


MODEL #: R19IH3S-MLA3-8

Pin Assignment of Cables

MIL-DTL-38999/3 RS232 Cable

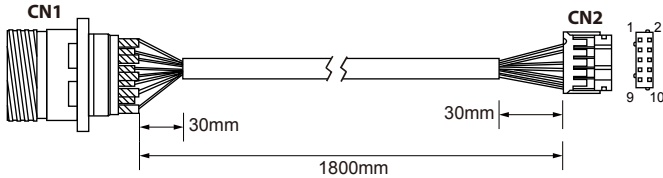

MIL-DTL-38999/3 VGA Cable

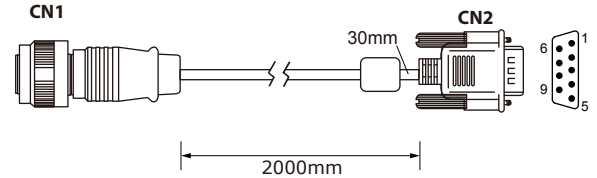

| PIN NO. | SYMBOLS | COLOR | | PIN NO. | SYMBOLS | COLOR |
|---------|---------|--------|---|---------|---------|--------|
| CN1-1 | R | Red | ↔ | CN2-4 | R | Red |
| CN1-2 | R-GND | Black | ↔ | CN2-9 | GND | Black |
| CN1-3 | G | Green | ↔ | CN2-6 | G | Green |
| CN1-4 | G-GND | Black | ↔ | CN2-9 | GND | Black |
| CN1-5 | B | Blue | ↔ | CN2-8 | B | Blue |
| CN1-6 | B-GND | Black | ↔ | CN2-10 | GND | Black |
| CN1-7 | SDA | Yellow | ↔ | CN2-1 | SDA | Yellow |
| CN1-8 | HS | Orange | ↔ | CN2-5 | HS | Orange |
| CN1-9 | VS | White | ↔ | CN2-7 | VS | White |
| CN1-10 | SCL | Brown | ↔ | CN2-3 | SCL | Brown |


Coaxial cable

Coaxial cable

Coaxial cable


| PIN NO. | SYMBOLS | COLOR | | PIN NO. | SYMBOLS | COLOR |
|---------|---------|--------|---|---------|---------|--------|
| CN1-1 | DCD | Green | ↔ | CN2-1 | DCD | Green |
| CN1-2 | DSR | Brown | ↔ | CN2-6 | DSR | Brown |
| CN1-3 | RXD | Red | ↔ | CN2-2 | RXD | Red |
| CN1-4 | RTS | Orange | ↔ | CN2-7 | RTS | Orange |
| CN1-5 | TXD | Blue | ↔ | CN2-3 | TXD | Blue |
| CN1-6 | CTS | White | ↔ | CN2-8 | CTS | White |
| CN1-7 | DTR | Purple | ↔ | CN2-4 | DTR | Purple |
| CN1-8 | RI | Yellow | ↔ | CN2-9 | RI | Yellow |
| CN1-9 | GND | Black | ↔ | CN2-5 | GND | Black |
| Braid | | 外殼 | ↔ | Braid | | 外殼 |

MIL-DTL-38999/1 AC Power Cable (For US)

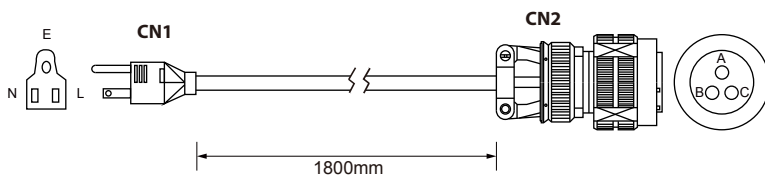

| PIN NO. | SYMBOLS | COLOR | | PIN NO. | SYMBOLS | COLOR |
|---------|---------|-------|---|---------|---------|-------|
| CN1-1 | N | White | ↔ | CN2-1 | A | White |
| CN1-2 | L | Black | ↔ | CN2-2 | B | Black |
| CN1-3 | E | Green | ↔ | CN2-3 | C | Green |

MIL-DTL-38999/1 DC Power cable (optional)

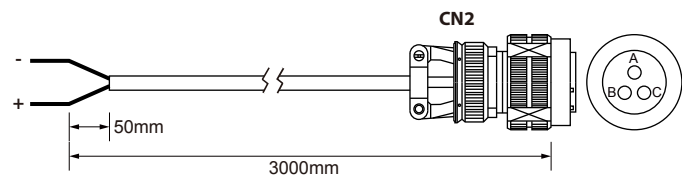

| PIN NO. | SYMBOLS | COLO | | PIN NO. | SYMBOLS | COLOR |
|---------|---------|-------|---|---------|---------|-------|
| OPEN | VCC+ | White | ↔ | CN2-A | VCC+ | White |
| OPEN | VCC- | Black | ↔ | CN2-B | VCC- | Black |