


cPCI-3920 Series

3U CompactPCI® Intel® Core™2 Duo Processor Blade with 3100 Chipset

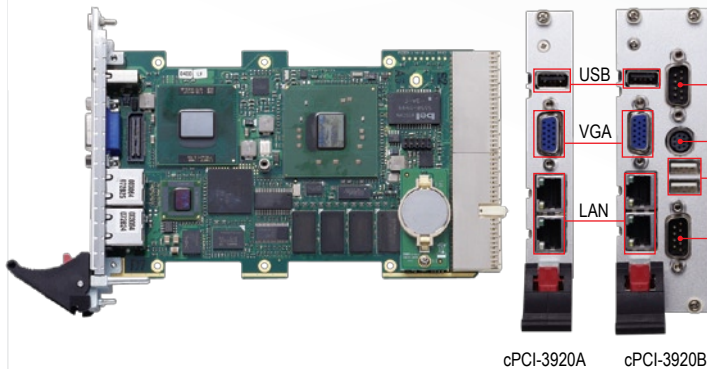

Features

- Low power Intel® Core™2 Duo and Core™ Duo processor
- Server class Intel® 3100 chipset
- DDR2-400 registered ECC soldered SDRAM
- Two PCI-Express® Gigabit Ethernet
- Supports USB 1.1/2.0 flash module and Serial ATA storage
- Three USB 2.0 and three serial ports

**EXTENDED
TEMPERATURE**

Specifications

Processor & System

CPU	<p>µFC-BGA Intel® Core™2 Duo LV (L7400) 1.5 GHz, 667 MHz FSB, 4 MB L2 cache</p> <p>µFC-BGA Intel® Core™ Duo ULV (U2500) 1.2 GHz, 533 MHz FSB, 2 MB L2 cache</p> <p>µFC-BGA Intel® Celeron® M Proc ULV (423) 1.07 GHz, 533 MHz FSB, 1 MB L2 cache</p>
Chipset	Intel® 3100 (Memory Controller Hub + I/O Controller Hub)
RAM	Single-Channel DDR2-400 Registered ECC soldered onboard, up to 2GB
BIOS	AMIBIOS® 16 Mbit FWH Flash Memory
CompactPCI Bus	32-bit/33 MHz CompactPCI® Bus, universal V(I/O)
PICMG Standards	<p>PICMG® 2.0 CompactPCI® R3.0</p> <p>PICMG® 2.1 Hot Swap R2.0</p>

Connectivity

Ethernet	Intel® PCI-Express® 82571EB dual port Ethernet controller Two front egress ports, switchable to RTM
Graphics	XGI Z11 PCI-E® x1 Graphics Controller 64-bit 2D Accelerator Up to 1600 x 1200 at 70 Hz 16 M colors
USB	Up to three front panel USB ports Two USB ports on RTM 9-pin header for horizontal USB NAND flash drive
PS/2	One PS/2 KB/MS Combo Port
Serial Port	Two DB-9 front panel ports, one is for RS-232, and the other one is selectable RS-232/422/485/485+ port Two RS-232 (Tx, Rx only) ports on RTM, one DB-9 connector on front panel, one 10-pin header onboard

Storage

SBC	Optional USB NAND flash drive, up to 8GB SATA port for 2.5" HDD direct mounting (8HP version only)
RTM	3x 7-pin SATA connectors for external HDD

Operating System

OS	<p>Microsoft® Windows® XP</p> <p>Microsoft® Windows® Server 2003</p> <p>Microsoft® Windows® Vista Enterprise, 32-bit</p> <p>Fedora™ 8</p> <p>Wind River VxWorks 6.6</p>
----	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Miscellaneous

LED	Three LEDs: Power, WDT, CPU over temperature
Battery	Adapter designed coin cell lithium battery for RTC CMOS RAM
Hardware Monitor	Integrated in W83792AG, monitors CPU temperature, Vcore and DC voltages
Watchdog Timer	Integrated in Intel® 3100, two stage, system reset and NMI, with programmable interval, 1 ms to 1050 sec.

Mechanical & Environmental

Form Factor	3U 4HP/8HP CompactPCI® 100mm x 160mm (LxW)	
Operating Temp.	0°C to +60°C with external air flow -20°C to +70°C extended temperature (cPCI-ET3920)	
Storage Temp.	-40°C to +85°C	
Rel. Humidity	5% to 95% non-condensing	
Shock	20G peak-to-peak, half sine, 11ms duration, operating	
Vibration	2 Grms, 5-500 Hz, each axis in operating	
Power Consumption	Core™2 Duo 1.5GHz (L7400), 1GB DDR2-400 soldered, under Windows® XP with 100% CPU loading	
	Current (A)	Power (W)
	3.3V	1.61 5.31
	5V	6.02 30.10
	Total	35.41
Weight	Net weight 461.5g in dual slot with heatsink	

Safety & EMI

Certifications	CE, FCC Class A
----------------	-----------------

I/O Table

		GbE	USB	VGA	COM 3/4	COM 1	COM 2	SATA	PS/2 KB/MS	LED	Reset Button
SBC											
cPCI-3920A	Faceplate	2*	1	1						3	1
	Onboard		1 (9-pin)								
cPCI-3920B	Faceplate	2*	3	1	1 (DB-9)				1	3	1
	Onboard		1 (9-pin)					1 (for 2.5" HDD)			
RTM											
cPCI-R3920 (T)	Faceplate	2*	2			1 (DB-9)					
	Onboard						1 (10-pin)	3 (7-pin)			

Note* : Switchable to front or rear by software selection.

Ordering Information

Model Number	Description/Configuration
CPU Board	
cPCI-3920A/C2D15/M1G	Single-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 512 MB soldered REG/ECC DDR2 SDRAM
cPCI-3920A/CM10/M1G	Single-slot 3U CompactPCI® Celeron® M LV 1.0 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/C2D15/M1G	Dual-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CD12/M1G	Dual-slot 3U CompactPCI® Core™ Duo 1.2 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CM10/M1G	Dual-slot 3U CompactPCI® Celeron® M LV 1.0 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/C2D15/M2G	Dual-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 2 GB soldered REG/ECC DDR2 SDRAM
cPCI-3920B/CD12/M2G	Dual-slot 3U CompactPCI® Core™ Duo 1.2 GHz SBC with 2 GB soldered REG/ECC DDR2 SDRAM
cPCI-ET3920B/C2D15/M1G	Dual-slot 3U CompactPCI® Core™2 Duo LV 1.5 GHz SBC with 1 GB soldered REG/ECC DDR2 SDRAM, -20°C to +70°C operating
Rear Transition Module	
cPCI-R3920	Rear Transition Module for cPCI-3920, 50 mm depth
cPCI-R3920T	Rear Transition Module for cPCI-3920, 80 mm depth
Accessories	
SUSB-4GB	4GB Low Profile USB flash module kit

Contact us for more CPU, memory & HDD options.

