


JBC400P691

Apollo Lake Fanless Embedded Barebone 1 LAN / 1 HDMI / M.2 SATA / 12V



Features

- Fanless Embedded Barebone System with Planned Lifecycle Through Q3'2031
- Intel Celeron N3350 Dual-core or Intel Pentium N4200 Quad-core, 6W TDP
- Supports DDR3L-1866 SODIMM up to 8GB Total
- HDMI (3840 x 2160 @30Hz)
- 1 * M.2 SATA 2242 only
- 1 * Full-size mini-PCIE Slot (or WIFI Installed)
- Gigabit LAN, 2 * USB 3.0 Ports
- Watchdog Timer, 40W AC Adapter Included
- VESA / WALL / DIN Rail Mounts Included
- Dimensions: 34 x 78.4 x 129mm

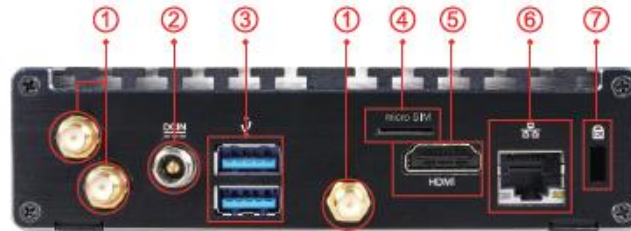

- | | |
|--------------|--------------------|
| 1. WiFi | 5. HDMI |
| 2. DC-in | 6. RJ45 |
| 3. USB 3.0 | 7. Kensington lock |
| 4. Micro SIM | |



- | | |
|-----------|--------------|
| 1. PW LED | 2. PW button |
|-----------|--------------|

Model	<ul style="list-style-type: none"> ■ JBC400P691
Part No	<ul style="list-style-type: none"> ■ HBJC400P691-335B (non-WIFI) ■ HBJC400P691W-335B (WIFI) ■ HBJC400P691-420B (non-WIFI) ■ HBJC400P691W-420B (WIFI)
Processor	<ul style="list-style-type: none"> ■ Fanless 6th Gen Intel Celeron N3350 Dual-core or Intel Pentium N4200 Quad-core, 6W TDP, Apollo Lake
Memory	<ul style="list-style-type: none"> ■ 1 * 204-pin SO-DIMM slots supporting DDR3L-1866 up to 8GB total
Storage	<ul style="list-style-type: none"> ■ 1 * M.2 SATA 2242 only
Network	<ul style="list-style-type: none"> ■ Realtek RTL8111H Gigabit LAN ■ 1 * Full-size mini-PCIE slot (802.11 b/g/n + BT 4.0 installed in WIFI model), Ext. SIM Card Slot
Other Features	<ul style="list-style-type: none"> ■ HDMI Audio, AHCI, Watchdog Timer 10-255 min/sec.
Rear Panel I/O	<ul style="list-style-type: none"> ■ 2 * USB 3.0 ports ■ 1 * HDMI 1.4 (4K @30Hz) ■ 1 * RJ45 ■ Micro SIM slot ■ 2 * Antenna holes ■ Kensington lock hole ■ 12V DC-in (1-pin 2.5mm ID, 5.5mm OD)
Front Panel I/O	<ul style="list-style-type: none"> ■ Power, Reset
BIOS	<ul style="list-style-type: none"> ■ AMI UEFI Flash ROM
Box Contents	<ul style="list-style-type: none"> ■ 40W AC Adapter, US Power Cord, Manual, DVD Driver disk, VESA/WALL/DIN rail mount, 2 *Antenna on WIFI model
Compliance	<ul style="list-style-type: none"> ■ CE, FCC, LVD, RoHS, ErP Ready
Temperature	<ul style="list-style-type: none"> ■ Operating Temperature 0~40° C, Storage Temperature -20-85 ° C
Dimensions	<ul style="list-style-type: none"> ■ 78.4 x 129 x 34mm (DxWxH)
OS Support	<ul style="list-style-type: none"> ■ Windows 10 64bit, Latest Linux Kernel
Warranty	<ul style="list-style-type: none"> ■ 2 Years limited warranty

*Specifications subject to change without notice, not responsible for typographical errors. Does not include Memory, Storage or OS.



Jetway Computer Corporation
Phone: 510-857-0130 Fax: 510-857-0138
8058 Central Ave., Newark, CA 94560
www.jetwaycomputer.com

