

Main Features

- Build-in Intel® Celeron® Processor 847E 1.1GHz
- Support two Ethernet LAN ports
- Removable 2.5" SSD tray and CFast slot
- Optional CAN/OBDII module (CAN Bus 2.0B or OBDII SAE J1939)
- Support two SIM card slots
- PCI-104 socket
- 9 ~ 36V wide range DC power input
- Smarter power management and low voltage protection
- Support 4 digital input and 4 digital output
- Rugged fanless design to meet MIL standard
- Internal wireless communication (3.5G, GSM/GPRS, WLAN, BT)
- Wake on RTC/SMS via WWAN module

Product Overview

VTC 7120-BK, adopting the high performance processor, Intel® Celeron® is a new generation of VTC series. In addition to keep the advantage of existing VTC series, it offers dual LAN ports for redundancy, two high speed interface for storage, 2.5" SATA and CFast. The storage is easily accessible from the front side for maintenance concern. Furthermore, it offers the OBDII for heavy duty truck such as SAE J1939 and support 4 digital input and 4 digital output for device connectivity. With the rich features, VTC 7120-BK can satisfy your demand in vehicle applications.

Specifications

CPU

- Intel® Celeron® Processor 847E 1.1GHz

Main Chipset

- QM67

Memory

- One 204-pin DDR3 1333MHz SO-DIMM slot (up to 8GB)

Expansion

- 1 x mini-PCIe socket (PCIe + USB) for WLAN option
- 1 x mini-PCIe socket (USB) for WWAN option
- 1 x Bluetooth module for option
- 1 x On board uBlox NEO-6Q GPS module or optional GPS with dead reckoning

I/O Interface-Front

- 1 x Line-out, 1 x Mic-in (for WWAN CM8000 voice communication)
- 2 x SIM card socket (selectable)
- 1 x System reset button
- 1 x USB 2.0 host type A connector
- 1 x Power button
- 1 x CFast with protection cover
- 1 x Accessible 2.5" SATA II SSD tray (optional lockable storage available)
- 4 x LED's for power, storage, WLAN/WWAN and GPIO
- G sensor

I/O Interface-Rear

- 1 x 9 ~ 36VDC input with ignition and 21W typical power consumption


- 1 x 12V/4A DC output, SMBus
- 1 x DB26 LVDS interface with 12V and USB 2.0
- 1 x DB15 VGA
- 1 x DB9 RS-232 (default) or optional CAN/OBDII module (CAN Bus 2.0B or OBDII SAE J1939)
- 1 x DB9 RS-422/485
- 1 x DB9 female connector for 4 x DI and 4 x DO (Digital Input)
 - Input voltage (Internal Type): 5VDC TTL (default)
 - Input voltage (Source Type): 3 ~ 12VDC(Digital Output)
 - Digital output (Sink Type): 5VDC TTL (default), max current: 20mA
 - Digital output (Source Type): 3 ~ 24VDC, max current: 250mA
- 1 x DB15 VGA
- 2 x USB 2.0 host type A connector
- 2 x RJ45 with LEDs for 10/100/1000Mbps Ethernet
- 1 x Line-out, 1 x Mic-in
- 1 x SMA-type GPS antenna connector
- 4 x Antenna hole reserved for SMA-type antenna connector (WWAN/WLAN/BT)

Power Management

- Selectable boot-up & shut-down voltage for low power protection by software
- Setting 8-level on/off delay time by software
- Status of ignition and low voltage status can be detected by software
- Support S3/S4 suspend mode

Operating System

Dimension Drawing

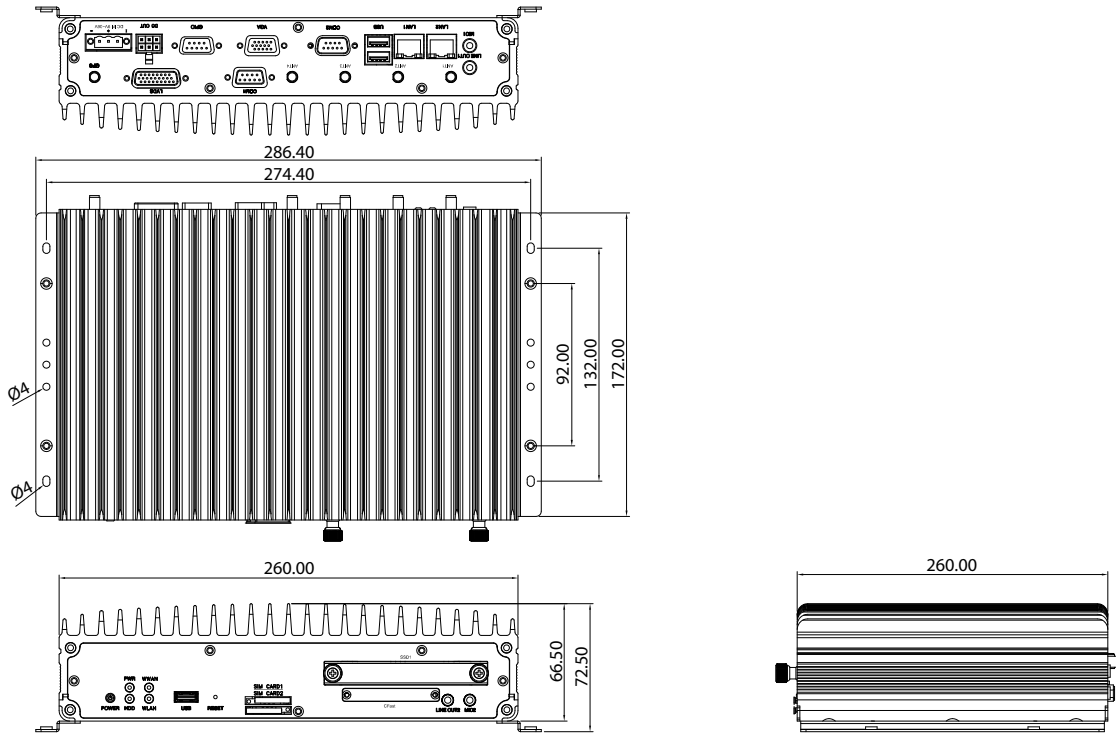

- Windows XP/WES2009
- WES 7E
- Win7 Pro for Embedded
- Linux 2.6

Dimensions

- 260mm (W) x 176mm (D) x 66.5mm (H) (10.24" x 6.93" x 2.59")
- 3.25 Kg (7.16 Lb)

Construction

- Aluminum enclosure with fanless design

Environment

- Operating temperatures:
 - 30°C to 50°C (w/ industrial SSD) with air flow
 - 20°C to 45°C (w/ commercial HDD) with air flow
- Storage temperatures: -35°C to 85°C
- Relative humidity: 10% to 90% (non-condensing)
- Vibration (random): 1g@5 ~ 500 Hz (in operation, SSD)
- Vibration (SSD):
 - Operating: MIL-STD-810G, Method 514.6, Category 4, common carrier US highway truck vibration exposure
 - Storage: MIL-STD-810G, Method 514.6, Category 24, minimum integrity test
- Shock (SSD):
 - Operating: MIL-STD-810G, Method 516.6, Procedure I, functional shock=20g
 - Non-Operating: MIL-STD-810G, Method 516.6, Procedure V, crash hazard shock test=75g

Standards/Certifications

- CE approval
- FCC Class A
- e13 Mark

Ordering Information

- ♦ **VTC 7120-BK (P/N: 10V00712000X0)**
Intel® Celeron® 847E 1.1GHz, 2GB DDR3 SODIMM, LVDS/VGA Output, 1 x RS-232, 1 x RS-422/485
- ♦ **VTC 7120-B2K (P/N: 10V00712003X0)**
Intel® Celeron® 847E 1.1GHz, Industrial Grade 2GB DDR3 SODIMM, DVI-D/VGA Output, 1 x RS-232, 1 x RS-422/485
- ♦ **Optional Accessories**

| Part No. | Description |
|---------------|---|
| 10VD0100000X0 | VMD 1000-B 7" monitor w/touch screen |
| 10VD0100101X0 | VMD 1001-B 7" Monitor w/touch screen, VGA interface |
| 10VD0200000X0 | VMD 2000-B 8" Monitor w/touch screen |
| 10VD0200200X0 | VMD 2002-B 8" Monitor w/touch screen, cable integration |
| 10VK0071F00X0 | VTK 71F, fan Kit |
| 10VK0006013X0 | Wireless mini card kit, Ralink 802.11b/g/n 2T2R, QCOM: Q802XKN5F, w/antenna & cable (without assembly in NEXCOM) |
| 10VK0WWAN01X0 | Cinterion PHS8-P kit, Five bands, UMTS/HSPA (850/800, 900, 1900 and 2100 MHz), Quad-Band GSM w/internal cable, antenna & packing (without assembly in NEXCOM) |
| 10VK00GPS00X0 | SKYTRAQ GPS + GLONASS, w/antenna & cable |
| 10VK0006007X0 | Bluetooth kit, QCOM: QBTM400-01 (V7), w/antenna & cable (without assembly in NEXCOM) |
| 7400120002X00 | Power adapter FSP: 120-AAB (N09001), 120W 19V/6.3A |
| 60233SAM03X00 | Internal cable for GSM/WLAN/GPS antenna connection MOQ: 20 pcs |
| 60233SAM05X00 | GPS antenna/5m/SMA180P |
| 60233SAM07X00 | GSM/GPRS antenna, SMA, support 850, 900, 1800, 1900 |
| 60233SMA30X00 | GPS+GSM combo antenna 5M/SMA180P |
| 60233SAM17X00 | GPRS/UMTS/HSDPA antenna, SMA, support 850, 900, 1800, 1900 and 2100 MHz |
| 60233SAM07X00 | GSM/GPRS antenna, SMA, support 850, 900, 1800, 1900 |
| 60233SMA30X00 | GPS+GSM combo antenna 5M/SMA180P |
| 60233SAM17X00 | GPRS/UMTS/HSDPA antenna, SMA, support 850, 900, 1800, 1900 and 2100 MHz |